
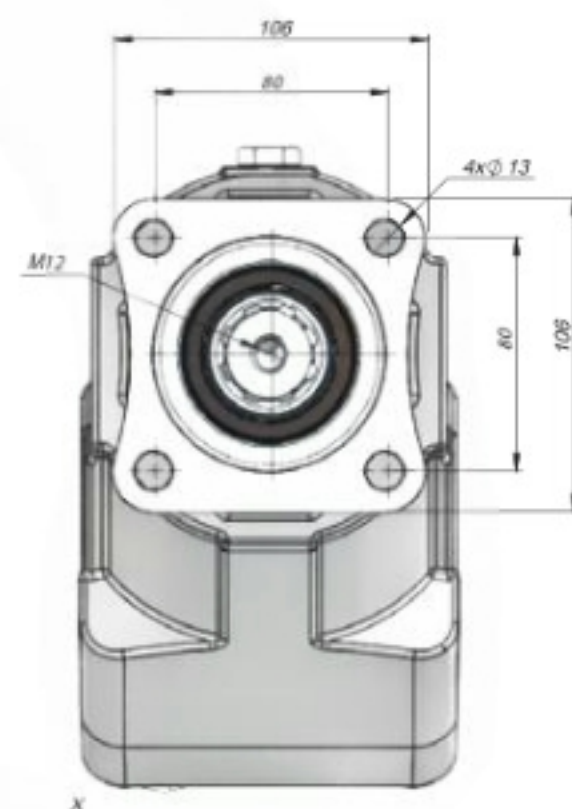
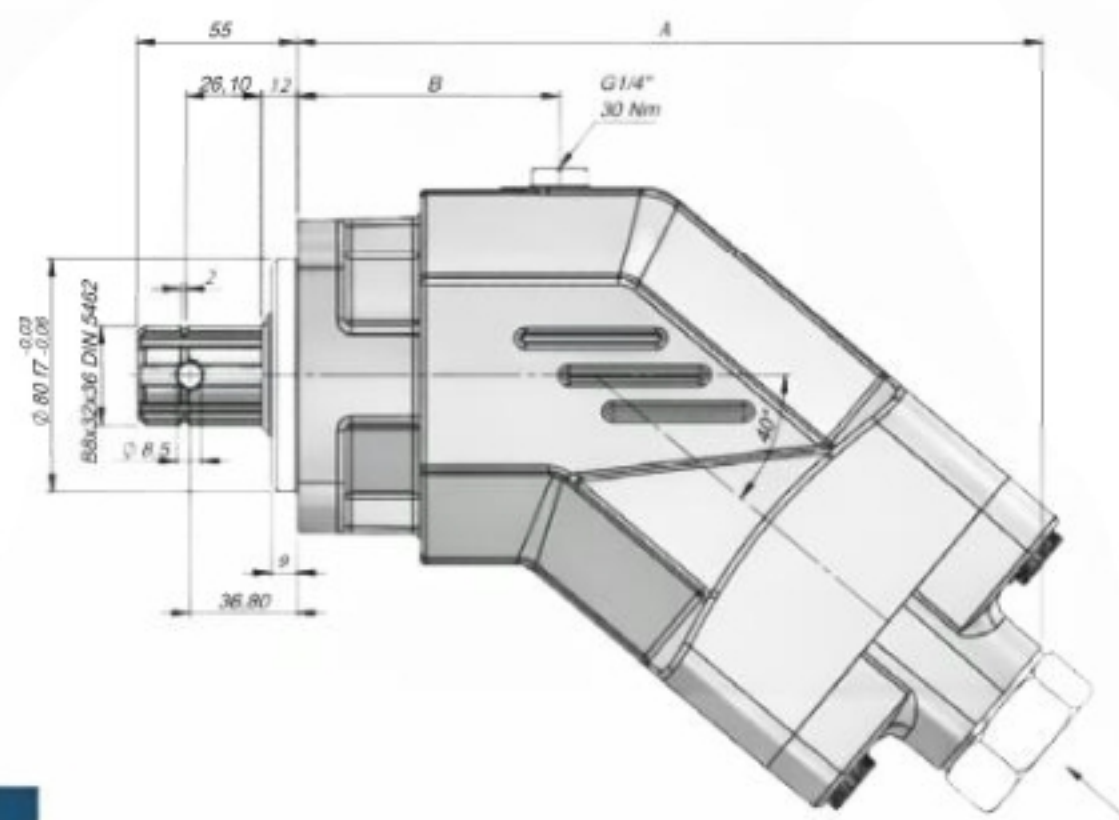


Гидронасос аксиально поршневой FEYZ KAZEL

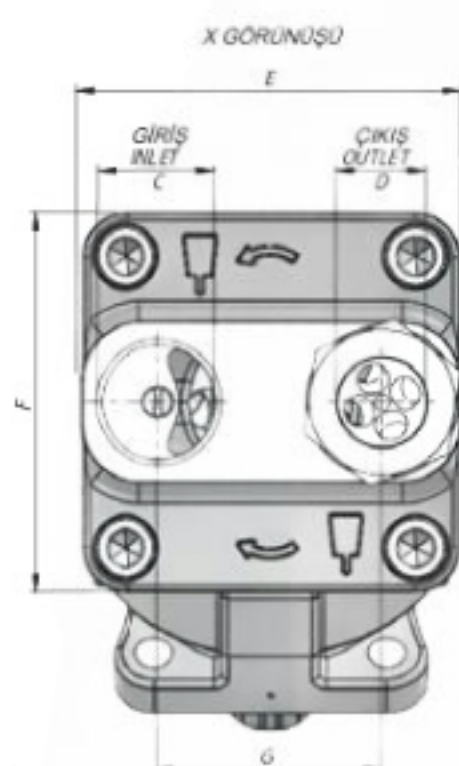

Момент затяжки штуцеров

G1/2"	55-65 Nm
G3/4"	90-100 Nm
G1"	135-160 Nm
G1 1/4"	200-230 Nm

КОД	Рабочий объём	Максимальное постоянное давление	Мп. Обороты	Частота вращения (об/мин)		A	B	C	D	E	F	G		
	(см³/об)	(100%)(BAR)	(об/мин)	(ном)	(max)	(mm)	(mm)	(inch)	(inch)	(mm)	(mm)	(mm)		
AP022SF1(1)1 AP022SF1(2)1	22	350	400	3050	4300	180	58	G3/4"	G1/2"	89	89	52		
AP033SF1(1)1 AP033SF1(2)1	33			2750	3900									
AP045SF1(1)1 AP045SF1(2)1	45			2650	3800	210	78	G1"	G3/4"	108.7	108.7	59		
AP056SF1(1)1 AP056SF1(2)1	56			2550	3700	218	80			110.5	108	64		
AP065SF1(1)1 AP065SF1(2)1	65			2200	3200									
AP080SF1(1)1 AP080SF1(2)1	80			2150	3100	245	94	G1 1/4"	G1"	127	118	69		
AP107SF1(1)1 AP107SF1(2)1	107			250	300	2000				2800	255	131.6	130	77
AP125SF1(1)1 AP125SF1(2)1	125					1750				2500				

* (1) - Левое
(2) - Правое